


HEAT RESISTANT PU TIMING BELT UP TO 100 °C

Mechanical and Chemical Properties:

Heat resistance on operating temperature
100°C
Very good resistance to hydrolysis
Good resistance to oil, solvents, hydrocarbons
Silent operations

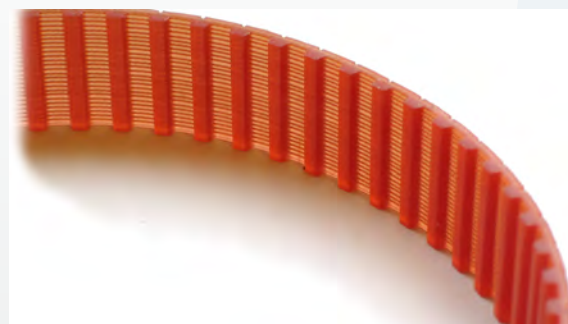

Type:	Tooth Profile:	Length: (mm)	Max Width: W (mm)	Cord reinforcement:	P (mm)	Alfa/R (°/mm)	H1 (mm)	H2 (mm)
T2,5-200	T2,5	200	72	Steel, Kevlar	2,5	40 °	0,7	0,6
T2,5-330	T2,5	330	88	Kevlar	2,5	40 °	0,7	0,6
T5-165	T5	165	72	Steel, Kevlar	5	40 °	1,2	1
T5-185	T5	185	70	Kevlar	5	40 °	1,2	1
T5-220	T5	220	70	Kevlar	5	40 °	1,2	1
T5-245	T5	245	70	Steel, Kevlar	5	40 °	1,2	1
T5-250	T5	250	70	Steel, Kevlar	5	40 °	1,2	1
T5-255	T5	255	70	Kevlar	5	40 °	1,2	1
T5-260	T5	260	75	Steel, Kevlar	5	40 °	1,2	1
T5-270	T5	270	75	Steel, Kevlar	5	40 °	1,2	1
T5-280	T5	280	75	Steel, Kevlar	5	40 °	1,2	1
T5-305	T5	305	75	Steel, Kevlar	5	40 °	1,2	1
T5-455	T5	455	105	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-500	T5	500	75	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-510	T5	510	75	Kevlar	5	40 °	1,2	1
T5-560	T5	560	75	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-610	T5	610	75	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-630	T5	630	98	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-690	T5	690	75	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-720	T5	720	85	Glass, Steel, Kevlar	5	40 °	1,2	1
T5-750	T5	750	75	Steel, Kevlar	5	40 °	1,2	1
T5-815	T5	815	75	Glass, Kevlar	5	40 °	1,2	1
T5-900	T5	900	75	Kevlar	5	40 °	1,2	1
AT5-320	AT5	320	70	Steel, Kevlar	5	50 °	1,2	1,5
AT5-420	AT5	420	75	Glass, Steel, Kevlar	5	50 °	1,2	1,5
AT10-580	AT10	580	70	Glass, Steel, Kevlar	10	50 °	2,5	2,5
T10-370	T10	370	70	Glass, Steel, Kevlar	10	40 °	2,5	2
T10-630	T10	630	105	Glass, Steel, Kevlar	10	40 °	2,5	2
T10-700	T10	700	105	Glass, Kevlar	10	40 °	2,5	2
T10-780	T10	780	75	Glass, Steel, Kevlar	10	40 °	2,5	2
T10-840	T10	840	70	Steel, Kevlar	10	40 °	2,5	2
T10-910	T10	910	75	Steel, Kevlar	10	40 °	2,5	2
T10-920	T10	920	210	Glass, Steel, Kevlar	10	40 °	2,5	2
T10-1110	T10	1110	70	Kevlar	10	40 °	2,5	2
84 XL	XL	213,36	75	Kevlar	5,08	40 °	1,32	1,22
100 XL	XL	254	75	Kevlar, Glass	5,08	40 °	1,32	1,22
102 XL	XL	259,08	75	Kevlar, Glass	5,08	40 °	1,32	1,22
120 XL	XL	304,8	75	Steel, Kevlar	5,08	40 °	1,32	1,22
130 XL	XL	330,2	75	Glass, Steel, Kevlar	5,08	40 °	1,32	1,22
134 XL	XL	340,36	75	Kevlar	5,08	40 °	1,32	1,22
150 XL	XL	381	75	Glass, Kevlar	5,08	40 °	1,32	1,22
180 XL	XL	457,2	75	Glass, Steel, Kevlar	5,08	40 °	1,32	1,22
187 L	L	474,98	155	Steel, Kevlar	9,525	40 °	1,85	1,7
240 L	L	609,6	75	Glass, Steel, Kevlar	9,525	40 °	1,85	1,7
285 L	L	723,9	75	Glass, Steel, Kevlar	9,525	40 °	1,85	1,7
322 L	L	817,88	70	Glass, Steel, Kevlar	9,525	40 °	1,85	1,7
340 L	L	863,6	90	Kevlar	9,525	40 °	1,85	1,7