


HEAT RESISTANT SILICONE TIMING BELT UP TO 200 °C

Application field: Aluminium industry, Glass industry
Oven, stove, furnace

Mechanical and Chemical Properties Heat resistance on operating temperature 200° C (on short run up to 230°C)
Very good resistance to hydrolysis
Good resistance to oil, solvents, hydrocarbons
Silent operations

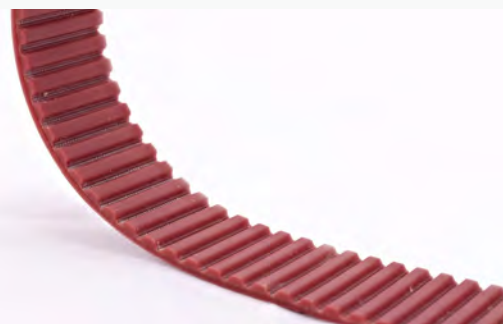

Type:	Tooth Profile:	Length: (mm)	Max Width: W (mm)	Cord reinforcement:	Grinding on tooth side:(mm)	Coating (max-min) (mm)	Coating (ShA)	P (mm)	Alfa/R (°/mm)	H1 (mm)	H2 (mm)
AT5-320	AT5	320	70	Glass	-	-	-	5	50 °	1,2	1,5
AT5-420	AT5	420	75	Glass	-	-	-	5	50 °	1,2	1,5
AT10-580	AT10	580	70	Glass	-	-	-	10	50 °	2,5	2,5
T10-630	T10	630	105	Glass	-	-	-	10	40 °	2,5	2
T10-700	T10	700	105	Glass	-	-	-	10	40 °	2,5	2
T10-780	T10	780	75	Glass	-	-	-	10	40 °	2,5	2
187 L	L	474,98	155	Glass	-	-	-	9,525	40 °	1,85	1,7
240 L	L	609,6	75	Glass	-	-	-	9,525	40 °	1,85	1,7
285 L	L	723,9	75	Glass	-	-	-	9,525	40 °	1,85	1,7

Notes:

1. The loadability of silicone belt is appr. 10% of the same profiled Pu belt, so it is offered for transporting.

