


DOUBLE MOULDED PU TIMING BELTS

Application field: packaging and paper industry

Advantages: long life-span
good adhesion
excellent abrasion resistance
optional direction of rotation
without glue

Application: pulling-off belts of VFFS packaging machines

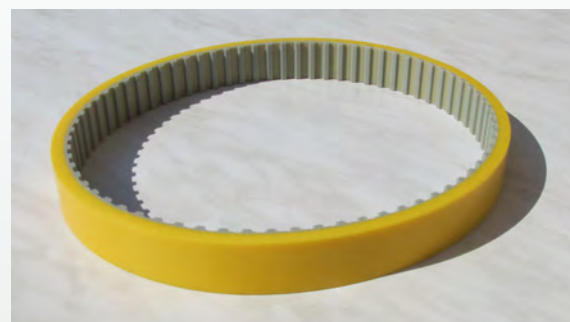

Type	Application sample	Pitch	Lenght (mm)	Width (mm)	Cord	Material of basic belt	Color of basic belt	Construction	Thickness of coating	Color of coating	Coating (ShA)
T2,5-330		2,5	330	max. 75	kevlar	PU (90±2ShA)	optional	cord support inside	3	natur	30-90
T5-260		5	260	max. 65	steel	PU (90±2ShA)	optional	cord support inside	3	optional	30-90
T5-270		5	270	max 65	steel	PU (90±2ShA)	optional	cord support inside	3	optional	30-90
AT5-660		5	660	max 90	steel	PU (90±2ShA)	gray	cord support inside	5,8,10	optional	30-90
AT5 710		5	710	max 90	steel	PU (90±2ShA)	gray	cord support inside	8	optional	30-90
187 L		9,525	476,25	max. 152,4(6")	kevlar	PU (90±2ShA)	blue	cord support inside	3	optional	30-90
210 L		9,525	533,4	max 100	kevlar	PU (90±2ShA)	gray	cord support inside	4	optional	30-90
240 L		9,525	609,6	max 95	kevlar/steel	PU (90±2ShA)	gray	cord support inside	6	optional	30-90
270 L		9,525	609,6	max 105	kevlar/steel	PU (90±2ShA)	gray	cord support inside	6	optional	30-90
320 XL		5,08	609,6	max 80	kevlar/steel	PU (90±2ShA)	gray	cord support inside	4	optional	30-90
T10 560		10	560	max 80	kevlar/steel	PU (90±2ShA)	gray	cord support inside	8	optional	30-90
T10 630	Rovema	10	630	max 95	kevlar	PU (90±2ShA)	optional	cord support outside	6	optional	30-90
T10 650		10	650	max 105	kevlar/steel	PU (90±2ShA)	gray	cord support inside	6	optional	30-90
T10 660		10	660	max 100	kevlar/steel	PU (90±2ShA)	gray	cord support inside	3	optional	30-90
T10 700		10	700	max 100	kevlar	PU (90±2ShA)	optional	cord support outside	3	optional	30-90
T10 720		10	720	max 95	kevlar	PU (90±2ShA)	optional	cord support outside	6	optional	30-90
S8M 656		8	656	max 75	glass	Rubber	black	without cord support	6	optional	30-90
RPP3M 174		3	174	max 85	glass	Rubber	black	without cord support	3	optional	30-90

Notes:

1. All poliurethane covered belts are coated with a one piece moulded, endless and refined cover, so the direction of rotation can be optional
2. The most of the cases Steel cord can be replaced optionally by Kevlar.